


ELEVATION VIEW

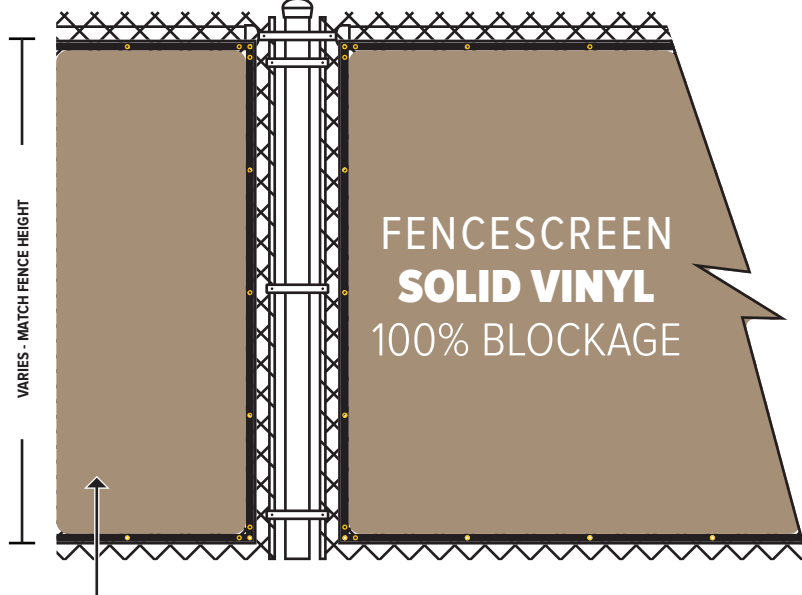


- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: 100% SOLID PVC (SOLID POLYVINYL CHLORIDE)

PROPERTIES	RESULTS
Weight	450 g/m ²
Warp Tensile	238 lbs.
Warp Tear	132 lbs.
Full Tensile	233 lbs.
Full Tear	126 lbs.
Hydrostatic Resist	375 lbs./in.
Shade Percentage	100%

ATTACHMENT DETAIL 3D

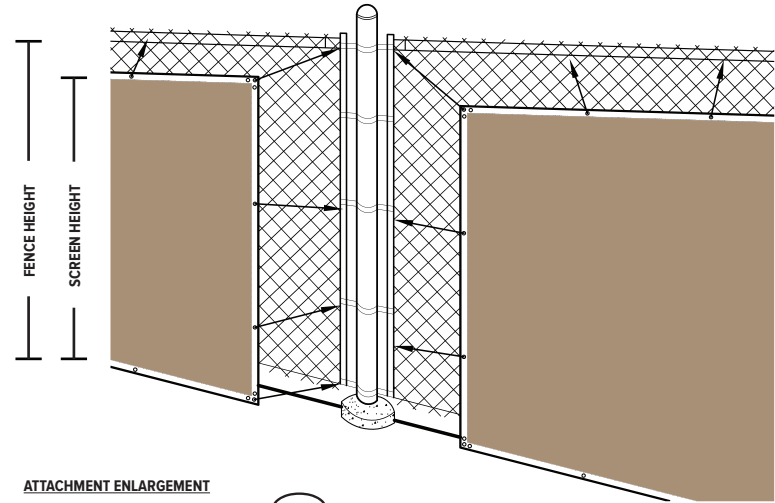

ATTACHMENT ENLARGEMENT

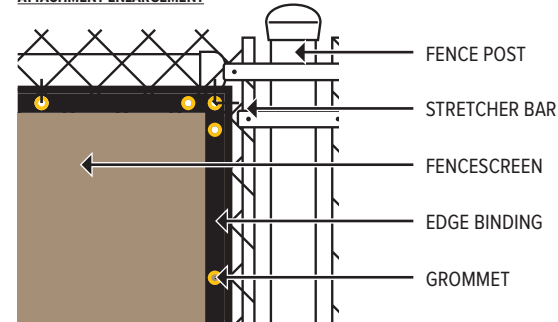

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE COLORS:



**400
SERIES**

**COMMERCIAL BLOCK
SOLID VINYL**



DRAWING # VL400 Solid Vinyl

**888-313-6313
WWW.FENCESCREEN.COM**