
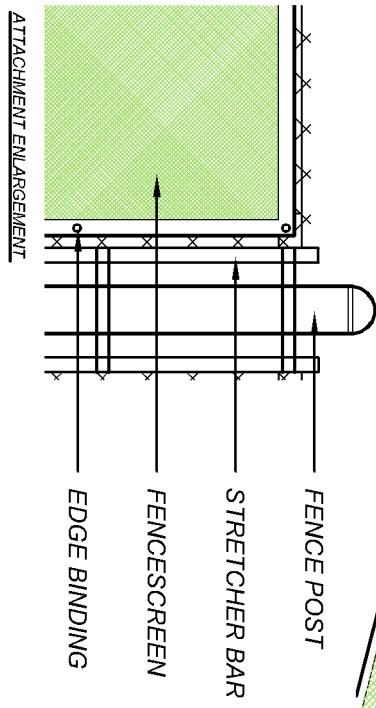


FENCESCREEN PANELS W/2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRACE GROMMETS @ 18" O.C. ATTACH TO FENCE W/STEEL HOG RINGS OR HEAVY DUTY ZIP TIES.

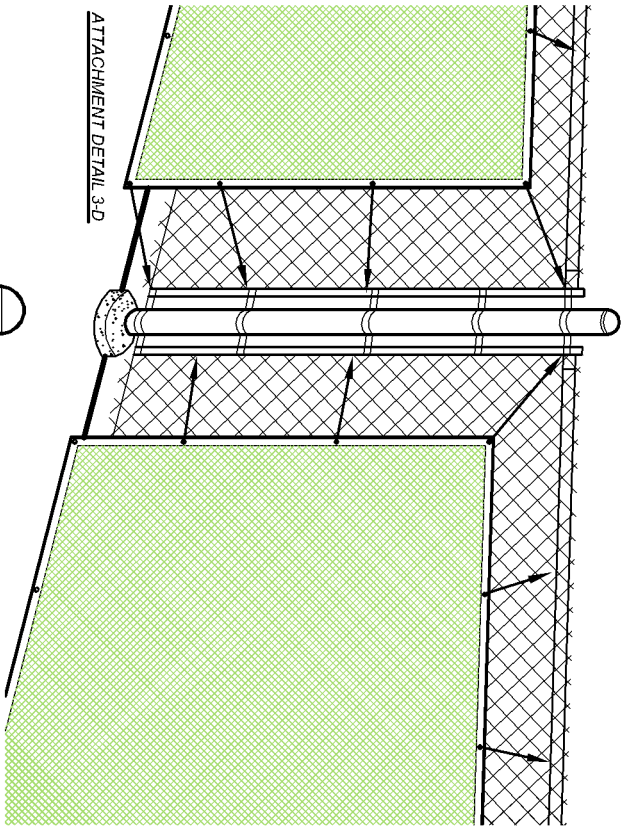

**FENCESCREEN SPECIFICATIONS**

PROPERTIES	TEST METHOD	RESULTS
TEAR STRENGTH	ASTM D-4533	40 LBS.
PUNCTURE STRENGTH	ASTM D-4833	50 LBS.
MULLEN BURST STRENGTH	ASTM D-3786	300 PSI
UV STABILITY @ 500 HOURS	ASTM D-4355	70% RETENTION
SHADE PERCENTAGE		95%

- NOTE:**
1. INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS- #888.313.6313
  2. REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

**COLOR TO BE PER FENCESCREEN COLORS:**

 BASALT GREEN

NO SCALE

DETAIL NAME:

**FENCE BLOCK- 95% BLOCKAGE**



DRAWING # FB 100

PHONE # 888-313-6313  
WWW.FENCESCREEN.COM